

- Shelves constructed of .75"x.75" sq. tubing 6063x.063 wall
- Aluminum .5"x1.5" channel for extra support and strength
- (4) square stem swivel casters with 5"x1.25" polyurethane non marking wheels 250lbs weight capacity per wheel - evenly distributed

• Constructed of all welded 16ga aluminum 1"x1" sq. tubing 6063 x .063 wall

Available with shelves or heavy duty 1" x1" slides





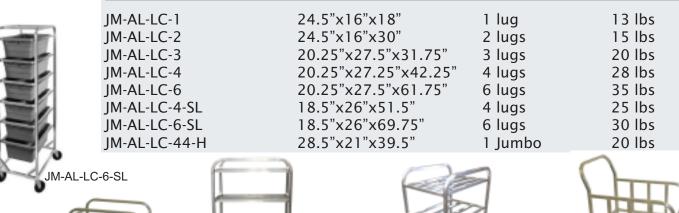







Capacity

1 lugs

2 lugs

6 lugs



20 lbs 25 lbs

40 lbs


• (4) square stem swivel casters with 5"x1.25" polyurethane non marking wheels 250lbs weight capacity per wheel - evenly distributed

- Available with shelves or heavy duty 1" x1" slides Mirror chrome finish powder coated
- Model **Dimensions**
- 24.5"x16"x18" J-LC-1-MCF 24.5"x16"x30" J-LC-2-MCF J-LC-6-SL-MCF 18.5"x26"x69.75"







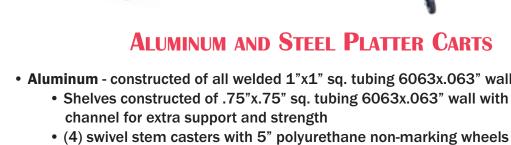



• Steel - constructed of all welded tubular steel frame and shelves with steel rod cross bracing

• (4) swivel stem casters with 5" polyurethane non-marking wheels

250lb weight capacity per wheel - evenly distributed

Powder coated finish



Full perimeter bumpers

FOUR-WHEELED

SIX-WHEELED







Shipping Weight

36 lbs

57 lbs

Shipping Weight

57 lbs

250lbs weight capacity per wheel - evenly distributed

Dimensions

20"x40"x30"

20"x50"x30"

Dimensions

28"x51"x35.5"

IM-AL-DPC-2040

JM-AL-PC-2050

• (2) swivel casters with 5" polyurethane non-marking wheels • (2) rigid casters with 5" polyurethane non-marking wheels 250lbs weight capacity per wheel - evenly distributed

• (4) swivel casters with 5" polyurethane non-marking wheels (2) rigid casters with 5" polyurethane non-marking wheels

JM-AL-PC-2050 ALUMINUM WET PRODUCE CARTS

Model

JM-AL-WPC-50


• Full perimeter or corner bumper options

2600lb Load capacity - evenly distributed

Galvanized steel construction with (2) steel shelves

J-UC-4821 (4-5" x2" wheels - 2 rigid, 2 swivel)

Model

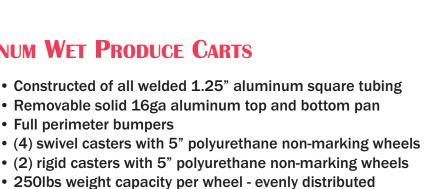

J-RPC-3047-C

Shipping Weight

64 lbs

63 lbs

64 lbs

81 lbs

76 lbs

59 lbs

J-UC-4821

185 lbs

140 lbs

53 lbs

J-UC-1648

of wheels

JM-AL-DPC-2040

of wheels

4

6



Model

J-WPC-50

MODEL J-UC-4821

Model

J-UC-2160-2-HD

JM-AL-UC-B-2460 (Bar)

JM-AL-UC-2460 (Solid)

Constructed of all welded 16ga 1" 16ga square steel tubing

• (4) 5"x1.25" swivel casters with 250lb capacity per wheel

J-SC-1836-F

Constructed of all welded 1"x 1" 16ga steel sq. tubing

• (2) swivel casters with 5"x 1.25" polyurethane wheels • (2) rigid casters with 5" x 1.25" polyurethane wheels 250lbs weight capacity per wheel - evenly distributed

• (4) swivel casters with 5" x 1.25" polyurethane wheels

• (2) rigid casters with 8" x 2" polyurethane wheels

250lbs weight capacity per wheel - evenly distributed

800lbs weight capacity per wheel - evenly distributed

Dimensions

18"x53"x39"

1000lb load weight capacity evenly distributed

Model

Available with full bumpers or corner bumpers to prevent damage

Solid 16ga aluminum top to protect against rust and corrosion (except J-2036-C)

J-WPC-50

J-PRO-2244-C

J-PRO-2444-F

J-RPC-3047-C

J-WPC-2540-MCF*

Constructed of all welded 1"x16ga steel sq. tubing Removable top pan constructed of 16ga aluminum

STEEL WET PRODUCE CARTS

- J-WPC-4425-MCF with handle


• (4) 4"x1.25" swivel casters with weight capacity of 200lbs per wheel • (2) 8"x2" rigid casters with weight capacity of 900lbs per wheel

• (4) 5"x2" polyurethane non-marking wheels, (2) rigid, (2) swivel, no wheel guards

J-PRO-2444-F J-WPC-4425-MCF J-PRO-2244-C STEEL UTILITY (U-BOATS) CARTS **BASE** • 14ga steel diamond plate • Reinforced bottom with .125"x 1.5"x1.5" angle steel and 12ga bolsters **HANDLES** Constructed of all welded 14ga 1.25"x1.25" round steel tubing J-UC-1660 WHEELS



JP-UC-2436-2

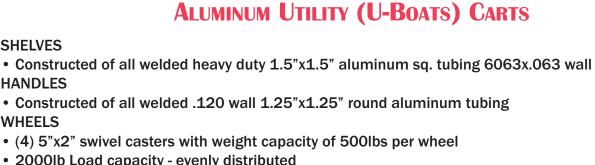

Dimensions

24"x60"x68"

24"x60"x68"

ALUMINUM STOCK CARTS

Dimensions

18"x36"x29"

18"x36"x29"

20"x36"x32"

STEEL STOCK CARTS

Dimensions

2-TIER STOCK CARTS

HEALTH AND BEAUTY CART

2-TIER CARTS WITH LIP-UP TRAYS

• All welded steel 1.5" x .125" frame with 1" x 16ga round steel tubing handle

 (2) swivel plate casters with 5" x 1.25" polyurethane non-marking wheels • (2) rigid plate casters with 5" x 1.25" polyurethane non-marking wheels

JM-AL-2436-BULK (aluminum)

STEEL 3 TIER STOCK CARTS


J-SC-1636-2T (Gray)

J-SC-2430-2T (Gray)



45 lbs

SC-2048-EXT

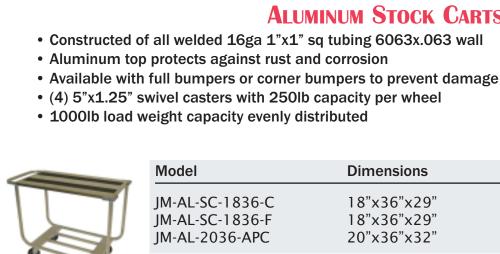

JM-AL-2036-C

(non-skid top)

Powder coated finish

Powder coated finish

FOUR-WHEELED

SIX-WHEELED

J-2T-1860-6 - top view

Model

J-SC-2040-BLK-F

•	J-SC-1836-C	18"x36"x29"	Corner	43 lb:
	J-SC-1836-F	18"x36"x29"	Full	44 lb:
	J-SC-2048-EXT	20"x48"x30.5"	Full	53 lb:
	J-2036-C	20"x36"x32"	Corner	49 lbs
	J-SC-2040-BLK-F	20"x40"x33"	Full	47 lbs
	100,000	N	_	mer tello

J-SC-1836-C

of Wheels

4 wheeled

4 wheeled


6 wheeled

4 wheeled

6 wheeled

Dimensions

20"x41"x32"



J-2T-1853-6

Model J-HBA-F

• 1000lb weight capacity - evenly distributed

Model

Full perimeter and front bumpers

Powder coated finish

Push/Pull handle

 Constructed of all welded 1"x1" angle Shelves constructed of 16ga sheet metal

• (4) 5" x 1.25" swivel casters

Powder coated finish

JMG-SS-SC-1827-3-V

STAINLESS STEEL

and 16ga aluminum top and bottom shelf

250lbs weight capacity per wheel - evenly distributed

- J-SC-2448-2T (Gray) JMG-SS-SC-2426-2T (Stainless Steel) JMG-SS-SC-2436-2T (Stainless Steel) JMG-SS-PC-2444-2T (Stainless Steel) JM-AL-2436-BULK
- Shelves constructed of 16ga sheet metal 304 #4 finish

• (4) 5"x1.25" swivel casters - 1000lb evenly distributed weight capacity JM-AL-2434-4-GAS has (4) 5"x2" swivel casters - 1500lb evenly distributed weight capacity

ALUMINUM AND STEEL 4 TIER STOCK CARTS

• (2) 5"x1.25" swivel casters and (2) 5"x1.25" rigid casters 1000lb evenly distributed weight capacity · Powder coated finish

STEEL

Model

J-TJNBC

STEEL

 Constructed of all welded 1"x1" 16ga sq tubing 304 stainless finish • (4) 5"x2" casters - (2) rigid, (2) swivel plate

250lb weight capacity per wheel, evenly distributed

ALUMINUM Constructed of all welded 1.25"x1.25" heavy duty sq tubing Shelves constructed of 16ga aluminum sheet

Notebook cart

3 tier lip up

Model Description JM-AL-SC-2448-4 Aluminum 4 tier/lip up

JM-AL-SC-2448-4

Shelves constructed of 16ga sheet metal

JM-AL-2434-GAS-4 Steel 4 tier J-SC-2448-HEB







Full perimeter bumpers

• (4) swivel stem casters with 5"x 1.25" polyurethane non-marking wheels (2) rigid casters with 5" x 1.25" polyurethane wheels (on 6 wheel models) 250lb weight capacity per wheel - evenly distributed

Dimensions

25"x 44"x 29.5"

22"x 44"x29.5" 24"x44"x29.5"

30"x47"x29.5"

25"x40"x29.5" 6 25"x44"x29.5"


of wheels

4

6

4

6

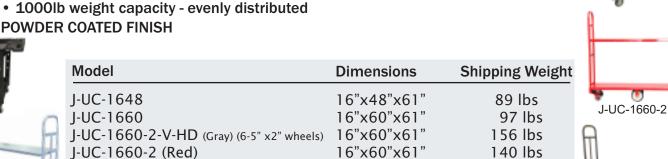

21"x60"x61"

21"x48"x61"

25.5"x44"x32.5"*

* includes handle length





J-2T-1836

Shipping Weight

42 lbs

39 lbs

80 lbs

44 lbs

82 lbs


J-2T-1860-6

J-2036-C

(solid steel top

Full

Corner

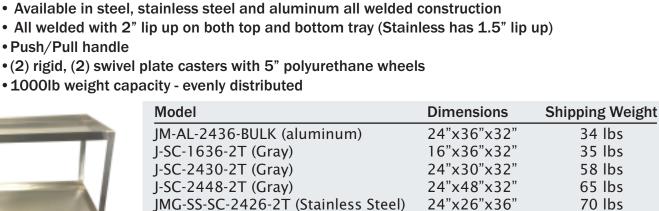

34"x36"x36"

24"x44"x36"

J-TJNBC

62 lbs

78 lbs

Shipping Weight

60 lbs

57 lbs

Shipping Weight

80 lbs

90 lbs

75 lbs



17"x37"x38"

19.25"x29.25"x35"

Constructed of 1"x1" 16ga sq tubing





J-SC-2448-4-HEB

